



Product data

Specification item	Value	Unit
Product name	DC MINI JOLLY DALI BI	
Order code	125403BI	
EAN (GTIN)	8010703381377	
Pieces per box	50	
Product weight	94	Gr
Made in	Italy	

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage	110...127 / 220...240	Vac	
Input voltage AC range	99...264	Vac	
Input voltage DC range	176...280	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,064	A	Referred to Vin = 230 V, 100% load
Rated input power	14,04	W	Referred to Vin = 230V, 100% load
Power factor	0,95	λ	
THD	< 10	%	Referred to Vin = 230 V, 100% load
Efficiency	87	%	Referred to Vin = 230 V, 100% load
Stand-by Power	< 0,5	W	
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant current / Constant voltage		
Output voltage	3...49	Vdc	
Output voltage max.	55	V	Open load
Output current	250...700	mA	
Output current min programmable	250	mA	
Output current min dimming	7	mA	
Output current tolerance	5	%	
Output power	1...20	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Operating window 230V

Pout W	Vout DC	Iout mA
12	15...49	250
17	10...49	350
19	5...49	400
20	5...45	450
20	5...40	500
20	3...36	550
20	3...33	600
20	3...28	700
16	24 const.	700

Operating window 110V

Pout W	Vout DC	Iout mA
12	15...49	250
15	10...42	350
15	5...37	400
15	5...45	450
15	5...30	500
15	3...27	550
15	3...25	600
15	3...21	700
15	24 cost.	625


Electrical data controls input

Specification item	Value	Unit	Condition
Control method	DALI-2		Default dimming: AM-PWM: 1-25% PWM (2kHz) 25 -100% AM. Full PWM dimming (240Hz - 1-100%) available by short circuit of NTC port during switch on of the driver. Same operation to reset to AM-PWM.
Dimming range	0,5...100%	%	

Wiring and connections


Specification item	Value	Unit	Condition
Input wire cross section	0.5...1.5 / 20...15	mm ² / AWG	L - N
Input wire strip length	8.5...9.5	mm	
Output wires cross section	0.5...1.5 / 20...15	mm ² / AWG	SEC, NTC
Output wire strip length	8...8.5	mm	
Control wire cross section	0.5...1.5 / 20...15	mm ² / AWG	DA - DA
Control wire strip length	8.5...9.5	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagram

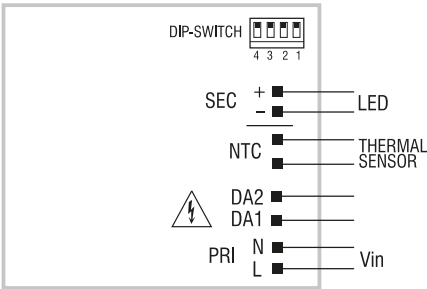

DALI diagram - Collegamento DALI

Dimensions

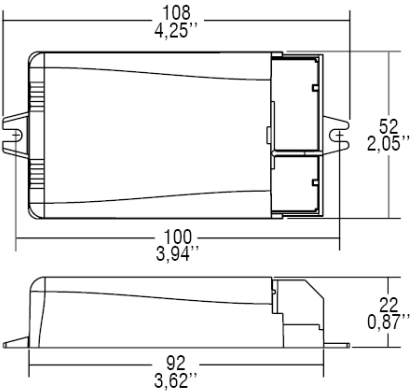


Insulation

Specification item	Output	Controls	Earth
Input	double or reinforced	basic	N/A
Output	N/A	N/A	N/A

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...45	°C	
Tc	75	°C	Maximum temperature measured at Tc point
Maximum housing temperature	120	°C	In case of failure

Temperature/Life

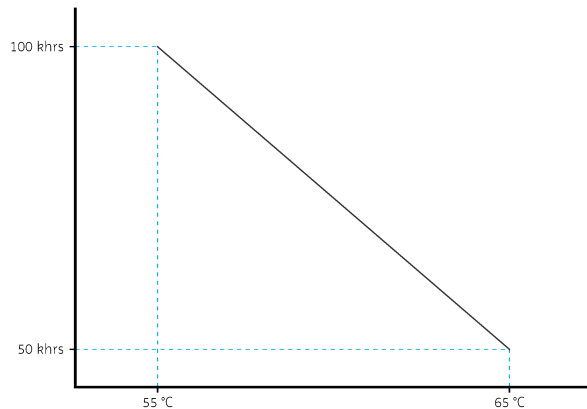

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	DIP-SWITCH	250mA	
Min Dimming Level	Yes	0,5%	
DALI part 251	Yes	OFF	

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class I/II	
DALI part 101	Yes	
DALI part 102	Yes	
DALI part 207	Yes	

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,104	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2	kV	
Mains surge immunity (comm. mode)	3	kV	

Application info

Specification item	Value
Approval marks	CE ENEC EAC RCM UL UKCA BIS
Application	Compact dimmable indoor
Mounting type	Built-in

Performance curves

