



Product data

Specification item	Value	Unit
Product name	PROFESSIONALE IN DALI 52	
Order code	127485	
EAN (GTIN)	8010703862494	
Pieces per box	30	
Product weight	185	Gr
Made in	Italy	

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage	220...240	Vac	
Input voltage AC range	198...264	Vac	
Input voltage DC range	176...275	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,269	A	Referred to $V_{in} = 230\text{ V}$, 100% load
Rated input power	59,86	W	Referred to $V_{in} = 230\text{ V}$, 100% load
Power factor	0,95	λ	
THD	< 10	%	Referred to $V_{in} = 230\text{ V}$, 100% load
Efficiency	90	%	Referred to $V_{in} = 230\text{ V}$, 100% load
Stand-by Power	< 0,5	W	
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Corrente costante		
Output voltage	10...42	Vdc	
Output voltage max.	59	V	Open load
Output current	650...1400	mA	
Output current min programmable	650	mA	
Output current min dimming	10	mA	
Output current tolerance	5	%	
Output power	6,5...52	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Label

Labels are for illustrative purposes only and may differ from the actual product

PROFESSIONALE IN DALI 52
 AC/DC LED P/S for LED
 MADE IN ITALY cod. 127485
 via Parma 14, FW242+208
 21047 Saronno(VA) Italy, www.tci.it

PRI: 220-240V~ 50/60Hz $\lambda_c = 0,95$
 $I_{max} = 0,3A$

SEC: 1400mA max; 52Wmax; Uout= 59V
 Dimming: DALI / PushSwitch
 $t_a = -20...45^{\circ}C$; $t_c = 90^{\circ}C$

176-275Vdc emerg. range, $I_{max} = 0,33A$

E, N, L: 0,75 - 2,5 LED, DA/N,
 DA/Ls: 0,5 - 1,5

10 - 11 mm 8 - 9 mm

Pout	SEC	1	2	3	4
27,3 W	650 mA	-	-	-	-
29,4 W	700 mA	ON	-	-	-
30,7 W	750 mA	-	ON	-	-
32,8 W	800 mA	ON	ON	-	-
34,8 W	850 mA	-	-	ON	-
36 W	900 mA	ON	-	ON	-
38 W	950 mA	-	ON	ON	-
40 W	1000 mA	ON	ON	ON	-
42 W	1050 mA	-	-	-	ON
42,9 W	1100 mA	ON	-	-	ON
44,8 W	1150 mA	-	ON	-	ON
46,8 W	1200 mA	ON	ON	-	ON
47,5 W	1250 mA	-	-	ON	ON
49,4 W	1300 mA	ON	-	ON	ON
51,3 W	1350 mA	-	ON	ON	ON
52 W	1400 mA	ON	ON	ON	ON

Before use, always check S1 switch settings

1 2 3 4

Operating window 230V

Pout W	Vout DC	Iout mA
27,3	10...42	650
29,4	10...42	700
30,7	10...41	750
32,8	10...41	800
34,8	10...41	850
36	10...40	900
38	10...40	950
40	8...40	1000
42	8...40	1050
42,9	8...39	1100
44,8	8...39	1150
46,8	8...39	1200
47,5	8...38	1250
49,4	8...38	1300
51,3	8...38	1350
52	8...37,5	1400


Electrical data controls input

Specification item	Value	Unit	Condition
Control method	DALI-2, Pulsante N/A, CLO		
Dimming range	1...100%	%	


Wiring and connections

Specification item	Value	Unit	Condition
Input wire cross section	0.75...2.5 / 18...13	mm ² / AWG	E - N - L, double connectors for looping
Input wire strip length	10...11	mm	
Output wires cross section	0.5...1.5 / 20...15	mm ² / AWG	LED
Output wire strip length	8...9	mm	
Control wire cross section	0.5...1.5 / 20...15	mm ² / AWG	DA/N - DA/Ls double connectors for looping
Control wire strip length	8...9	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagrams

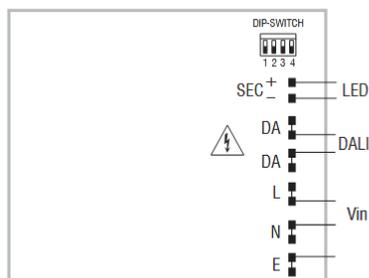


DALI diagram - Collegamento DALI

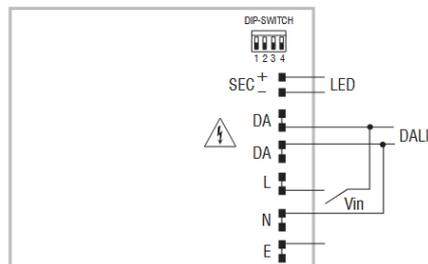

PUSH SWITCH diagram - Collegamento PUSH SWITCH

Dimensions

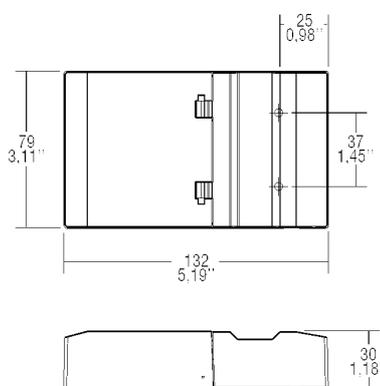


Insulation

Specification item	Output	Controls	Earth
Input	double or reinforced	basic	double or reinforced
Output	N/A	double or reinforced	N/A
Control			double or reinforced

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20...45	°C	
Tc	90	°C	Maximum temperature measured at Tc point
Maximum housing temperature	110	°C	In case of failure

Temperature/Life

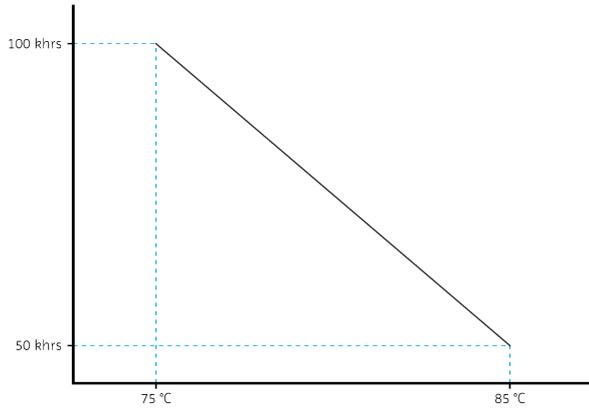

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	DIP-SWITCH	650mA	
Constant Light Output (CLO)	Yes	OFF	
Push Switch	Yes	ON	
Min Dimming Level	Yes	1%	
DALI part 251	Yes	OFF	

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class I/II	
Emergency Lighting (EL)	Yes	
DALI part 101	Yes	
DALI part 102	Yes	
DALI part 207	Yes	
DALI part 252	Yes	
DALI part 253	Yes	

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,2	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2	kV	
Mains surge immunity (comm. mode)	4	kV	

Application info

Specification item	Value
Approval marks	CE ENEC EAC UKCA
Ingress Protection classification (IP)	20
Application	Compact dimmable indoor
Mounting type	Independent
Cut hole diameter	Ø88

Performance curves

