



Product data

Specification item	Value	Unit
Product name	PRO FLAT DALI	
Order code	127576	
EAN (GTIN)	8010703393639	
Pieces per box	50	
Product weight	108	Gr
Made in	Italy	

Electrical input data


Specification item	Value	Unit	Condition
Rated input voltage	220...240	Vac	
Input voltage AC range	198...264	Vac	
Input voltage DC range	176...275	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,128	A	Referred to Vin = 230 V, 100% load
Rated input power	29,51	W	Referred to Vin = 230V, 100% load
Power factor	0,95	λ	Pout > 6 W
THD	< 10	%	Referred to Vin = 230 V, 100% load
Efficiency	90	%	Referred to Vin = 230 V, 100% load
Stand-by Power	< 0,5	W	
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant current		
Output voltage	10...49	Vdc	
Output voltage max.	59	V	Open load
Output current	250...700	mA	
Output current min programmable	250	mA	
Output current min dimming	7	mA	
Output current tolerance	5	%	
Output power	2,5...26	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Labels

Labels are for illustrative purposes only and may differ from the actual product

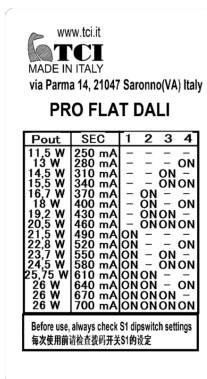

Operating window 230V

Pout W	Vout DC	Iout mA
11,5	10...49	250
13	10...49	280
14,5	10...49	310
15,5	10...48	340
16,7	10...48	370
18	10...47	400
19,2	10...47	430
20,5	10...47	460
21,5	10...46	490
22,8	10...46	520
25,7	10...44	550
26	10...41	580
26	10...39	610
26	10...37	640
26	10...39	670
26	10...37	700


Electrical data controls input

Specification item	Value	Unit	Condition
Control method	DALI-2, PUSH SWITCH		
Dimming range	1...100%	%	


Wiring and connections

Specification item	Value	Unit	Condition
Input wire cross section	0.75...1.5 / 18...15	mm ² / AWG	
Input wire strip length	8.5...9.5	mm	
Output wires cross section	0.5...1.5 / 20...15	mm ² / AWG	
Output wire strip length	8.5...9.5	mm	
Control wire cross section	0.75...1.5 / 18...15	mm ² / AWG	
Control wire strip length	8.5...9.5	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagrams

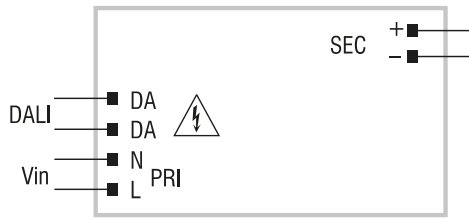


DALI diagram
Collegamento DALI

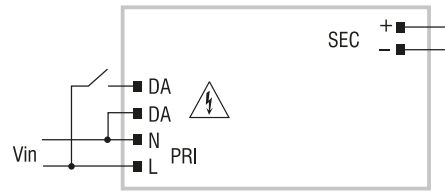

PUSH SWITCH diagram
Collegamento PUSH SWITCH

Dimensions

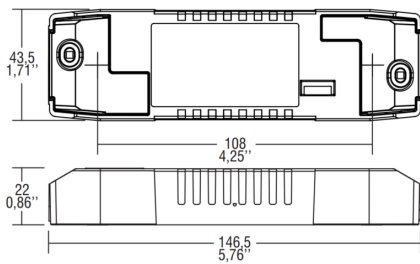


Insulation

Specification item	Output	Controls	Earth
Input	double or reinforced	basic	N/A
Output	N/A	double or reinforced	N/A

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...40	°C	
Tc	80	°C	Maximum temperature measured at Tc point
Maximum housing temperature	110	°C	In case of failure

Temperature/Life

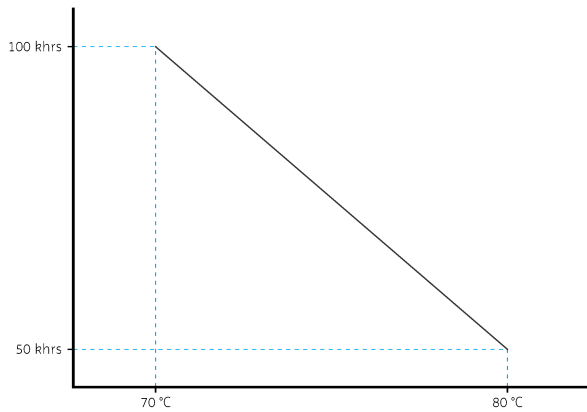

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	DIP-SWITCH	250mA	
Push Switch	Yes	ON	
Min Dimming Level	Yes	1%	
DALI part 251	Yes	OFF	

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class I/II	
DALI part 101	Yes	
DALI part 102	Yes	
DALI part 207	Yes	
DALI part 252	Yes	
DALI part 253	Yes	

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,2	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2	kV	
Mains surge immunity (comm. mode)	4	kV	

Application info

Specification item	Value
Approval marks	CE ENEC EAC RCM CCC UKCA
Ingress Protection classification (IP)	20
Application	Compact dimmable indoor
Mounting type	Independent
Cut hole diameter	Ø50

Performance curves

