



Software: TCI_NFC_READER

<https://win.tcisonno.com/public/CMS/Files/11436/Setup-NFC-DALI-1-0-0-180-1.zip>



Product data

Specification item	Value	Unit
Product name	ATON PRO 38/150-1050 NFC BI	
Order code	127689	
EAN (GTIN)	8010703874213	
Pieces per box	70	
Product weight	110	Gr
Made in	Italy	


Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage	220...240	Vac	
Input voltage AC range	198...264	Vac	
Input voltage DC range	176...276	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,186	A	Referred to Vin = 230 V, 100% load
Rated input power	43,12	W	Referred to Vin = 230V, 100% load
Power factor	0,95	λ	Pout > 14W
THD	< 10	%	Referred to Vin = 230 V, 100% load
Efficiency	89	%	Referred to Vin = 230 V, 100% load
Isolation input to output	SELV		

Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant current		
Output voltage	10...54	Vdc	
Output voltage max.	59	V	Open load
Output current	150...1050	mA	
Output current min programmable	150	mA	
Output current tolerance	5	%	
Output power	5...38	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Operating window (230V)

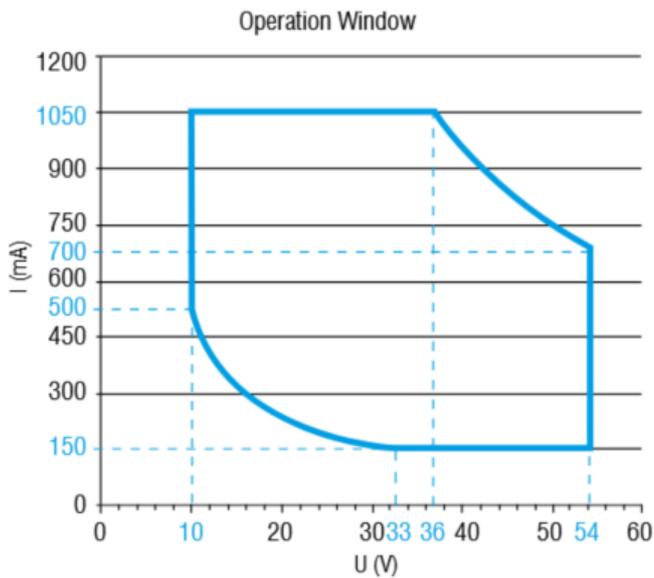

Label

Labels are for illustrative purposes only and may differ from the actual product

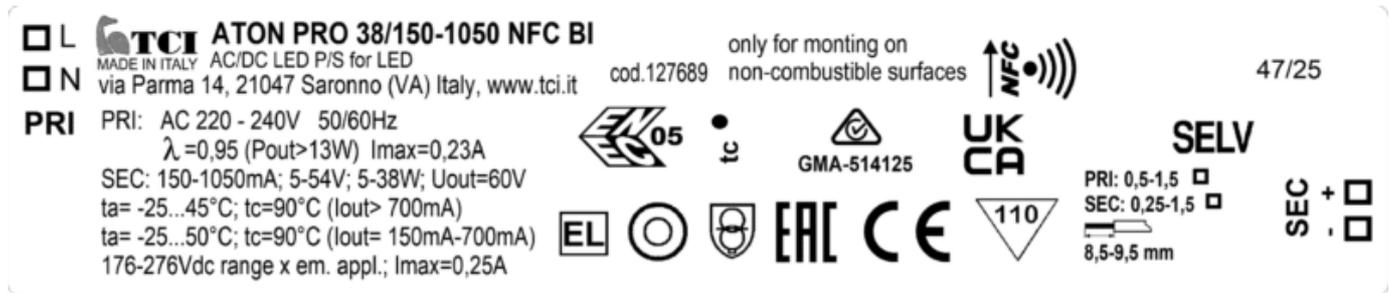


Electrical data controls input

Specification item	Value	Unit	Condition
Control method	ON-OFF		


Wiring and connections

Specification item	Value	Unit	Condition
Input wire cross section	0.75...1.5 / 18...15	mm ² / AWG	
Input wire strip length	8.5...9.5	mm	
Output wires cross section	0.25...1.5 / 23...15	mm ² / AWG	
Output wire strip length	8.5...9.5	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagram

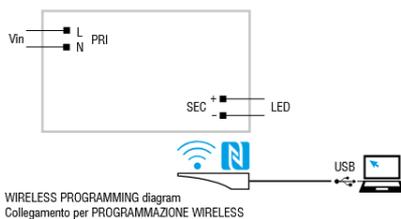

Dimensions

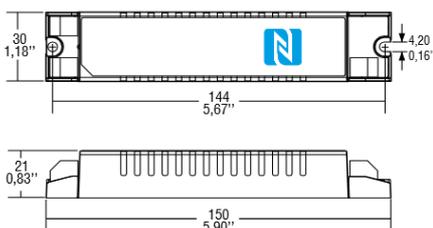


Insulation

PRI - SEC	double or reinforced
-----------	----------------------

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+50	°C	
Tc	75	°C	Maximum temperature measured at Tc point
Maximum housing temperature	110	°C	In case of failure

Temperature/Life

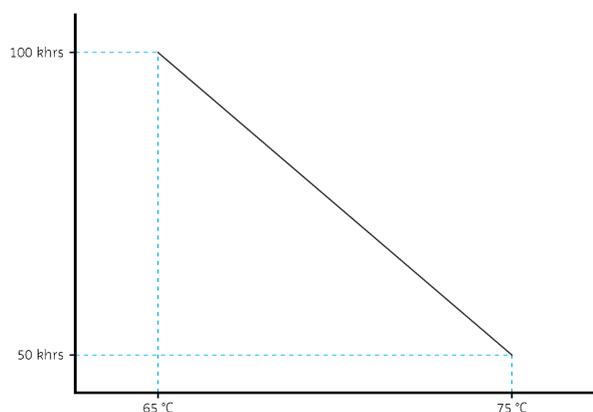

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class II	
Emergency Lighting (EL)	Yes	

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC	300mA	

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,08	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2	kV	
Mains surge immunity (comm. mode)	4	kV	

Application info

Specification item	Value
Approval marks	CE ENEC RCM UKCA
Application	Linear not dimmable
Mounting type	Built-in

Performance curves

