


Software: TCI_NFC_READER
<https://win.tcisonno.com/public/CMS/Files/11436/Setup-NFC-DALI-1-0-0-155.zip>

Product data

Specification item	Value	Unit
Product name	SVM 52 300-1400 110-277V 1-10V NFC	
Order code	142064	
EAN (GTIN)	8010703464087	
Pieces per box	30	
Product weight	264	Gr
Made in	Italy	


Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage	110...120 / 220...240 / 277	Vac	
Input voltage AC range	100...305	Vac	
Input voltage DC range	176...276	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,256	A	Referred to Vin = 230 V, 100% load
Rated input power	57,86	W	Referred to Vin = 230V, 100% load
Power factor	0,92	λ	Pout > 25W
THD	< 10	%	Referred to Vin = 230 V, 100% load
Efficiency	90	%	Referred to Vin = 230 V, 100% load
Stand-by Power	< 0,5	W	
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant current		
Output voltage	5...54	Vdc	
Output voltage max.	59	V	Open load
Output current	300...1400	mA	
Output current min programmable	300	mA	
Output current min dimming	7	mA	
Output current tolerance	5	%	
Output power	16...52	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Operating window (230V)

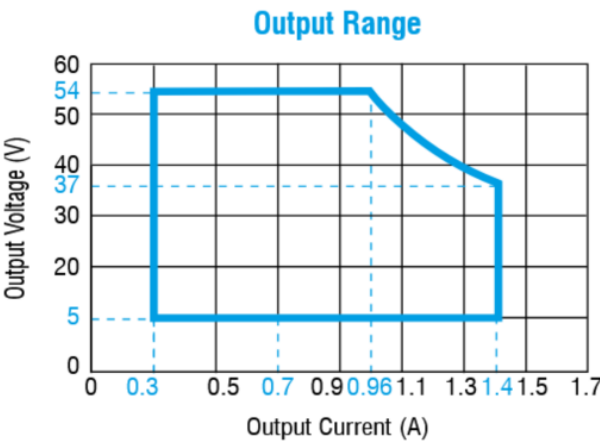

Label

Labels are for illustrative purposes only and may differ from the actual product

TCI

MADE IN ITALY

via Parma 14, 21047 Saronno(VA) Italy, www.tci.it, tc@tci.it

SVM 52 300-1400 110-277V 1-10V NFC

AC/DC PIS for LED

cod. 142064

PRI: 110°-277Vac 50-60Hz Imax= 0,22-0,6*A

110°-240Vac 50-60Hz Imax= 0,27-0,8*A; λ = 0,35 C-0,99* (0,9 C@Pos25W)

SEC: 300-1400mA; Prated= 1-52W; 5-54Vdc; Uout= 60Vdc

ta= -25...50°C ; tc= 80°C

FW: 1862*304*213

176-275Vdc range x emerg. appl.; Imax= 0.33A

15mm

145mm

PIS-SEC

52-1.5

0.5 - 9.5mm

110

-47/25-01

SELV

SEC

+

1-10V

+

142064 - SVM 52 300-1400 110-277V 1-10V NFC - v. 20260123

Electrical data controls input

Specification item	Value	Unit	Condition
Control method	1-10V		
Dimming range	1...100	%	

Wiring and connections

Specification item	Value	Unit	Condition
Input wire cross section	0.2...1.5 / 24...15	mm ² / AWG	
Input wire strip length	8.5...9.5	mm	
Output wires cross section	0.2...1.5 / 24...15	mm ² / AWG	
Output wire strip length	8.5...9.5	mm	
Control wire cross section	0.2...1.5 / 24...15	mm ² / AWG	
Control wire strip length	8.5...9.5	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagrams




1...10 V diagram
Collegamento 1...10 V



WIRELESS PROGRAMMING diagram
Collegamento per PROGRAMMAZIONE WIRELESS

Dimensions

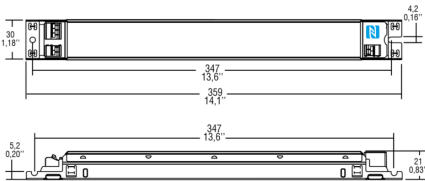


Insulation

PRI - SEC	double or reinforced
PRI - 1-10V	double or reinforced
1-10V - SEC	supplementary

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...+50	°C	
T _c	80	°C	Maximum temperature measured at T _c point
Maximum housing temperature	110	°C	In case of failure

Temperature/Life

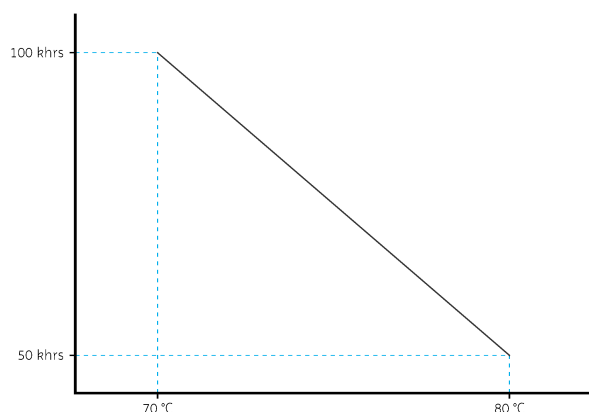

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class I	
Emergency Lighting (EL)	Yes	

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC	500mA	
Setting 1-10V	Yes	OFF	Linear, linear soft, logarithmic curve and related control voltages

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,05	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	
Mains surge immunity (comm. mode)	2	kV	

Application info

Specification item	Value
Approval marks	CE ENEC (PENDING) RCM (PENDING) UL (PENDING) UKCA
Application	Linear dimmable
Mounting type	Built-in

Performance curves

