



Product data

Specification item	Value	Unit
Product name	PRO FLAT 22 BI	
Order code	127571	
EAN (GTIN)	8010703383074	
Pieces per box	50	
Product weight	97	Gr
Made in	Italy	

Electrical input data


Specification item	Value	Unit	Condition
Rated input voltage	220...240	Vac	
Input voltage AC range	198...264	Vac	
Input voltage DC range	176...275	Vdc	Factory default 100% EOFi= 1
Rated input frequency	50...60	Hz	
Rated input current	0,110	A	Referred to Vin = 230 V, 100% load
Rated input power	24,60	W	Referred to Vin = 230V, 100% load
Power factor	0,95	λ	Pout > 5,5 W
THD	< 15	%	Referred to Vin = 230 V, 100% load
Efficiency	88	%	Referred to Vin = 230 V, 100% load
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Corrente costante		
Output voltage	5...44	Vdc	
Output voltage max.	59	V	Open load
Output current	125...500	mA	
Output current min programmable	125	mA	
Output current tolerance	5	%	
Output power	3...22	W	
Output current ripple	< 3	%	
Output Pst LM	< 1		
Output SVM	< 0,4		

Label

Labels are for illustrative purposes only and may differ from the actual product

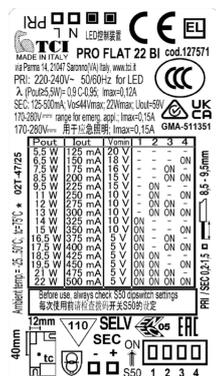

Operating window 230V

Pout W	Vout DC	Iout mA
5,5	20...44	125
6,5	18...44	150
7,5	16...44	175
8,5	15...44	200
9,5	15...44	225
11	10...44	250
12	10...44	275
13	10...44	300
14	10...44	325
15	10...44	350
16,5	5...44	375
17,5	5...44	400
18,5	5...44	425
19,5	5...44	450
21	5...44	475
22	5...44	500


Electrical data controls input

Specification item	Value	Unit	Condition
Control method	ON-OFF		


Wiring and connections

Specification item	Value	Unit	Condition
Input wire cross section	0.2...1.5 / 24...15	mm ² / AWG	
Input wire strip length	8.5...9.5	mm	
Output wires cross section	0.2...1.5 / 24...15	mm ² / AWG	
Output wire strip length	8.5...9.5	mm	
Max. cable length		cm	Max. LED distance see page info 8

Wiring diagram

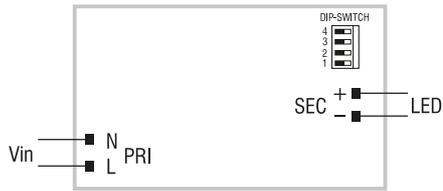

Dimensions

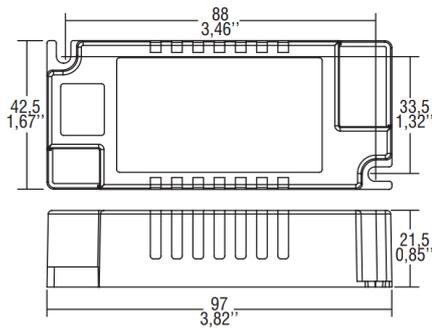


Insulation

Specification item	Output	Controls	Earth
Input	double or reinforced	N/A	N/A

Operation temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-25...50	°C	
Tc	75	°C	Maximum temperature measured at Tc point
Maximum housing temperature	110	°C	In case of failure

Temperature/Life

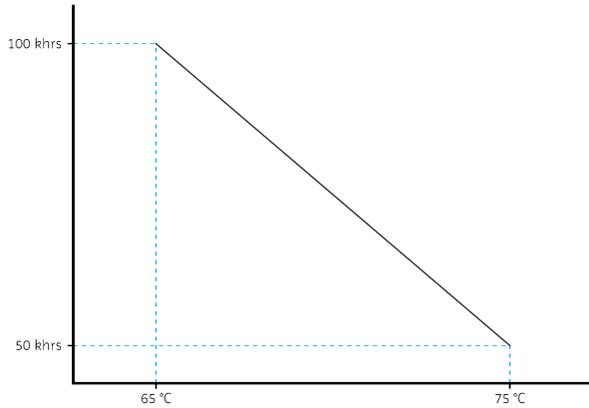

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-30...85	°C	
Relative humidity	5...85	%	Non condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	DIP-SWITCH	125mA	

Features

Specification item	Value	Condition
Open load	Yes	
Short circuit	Yes	
Over load and thermal protection	Yes	C.5.a
Hot plug	No	
Suitable for fixtures with protection class	class I/II	
Emergency Lighting (EL)	Yes	

In rush current

Specification item	Value	Unit	Condition
In rush current	5/50	A / usec	
Drivers / MCB 16A type B	50	pcs	

Driver touch current / protective conductor current

Specification item	Value	Unit	Condition
Typical Protective Conductor Current	0,2	mA	

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2	kV	
Mains surge immunity (comm. mode)	3	kV	

Application info

Specification item	Value
Approval marks	CE ENEC RCM CCC UKCA EAC
Application	Compact not dimmable indoor
Mounting type	Buit-in

Performance curves

